









CREATOR (CHINA) TECH CO., LTD

One-stop Self-service Kiosk Solution Provider

CRT-310-N

Motor Card Reader

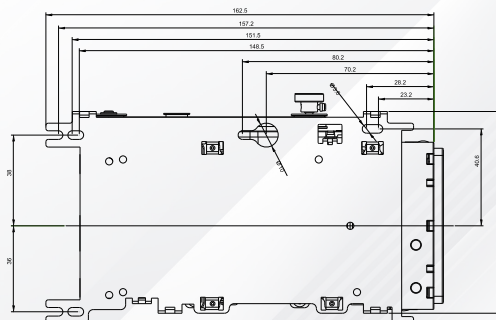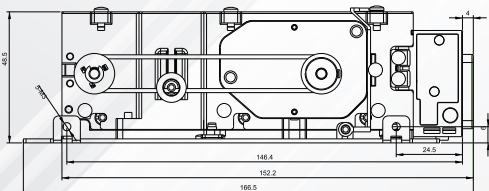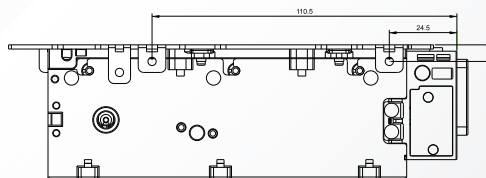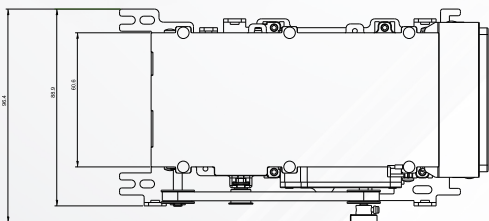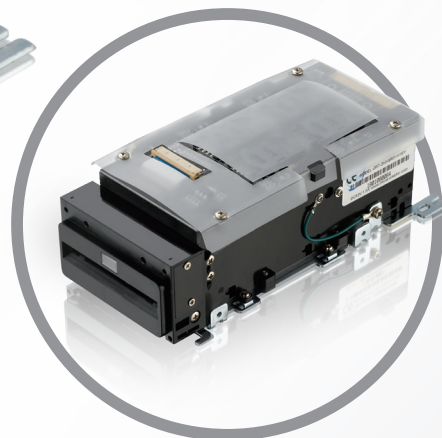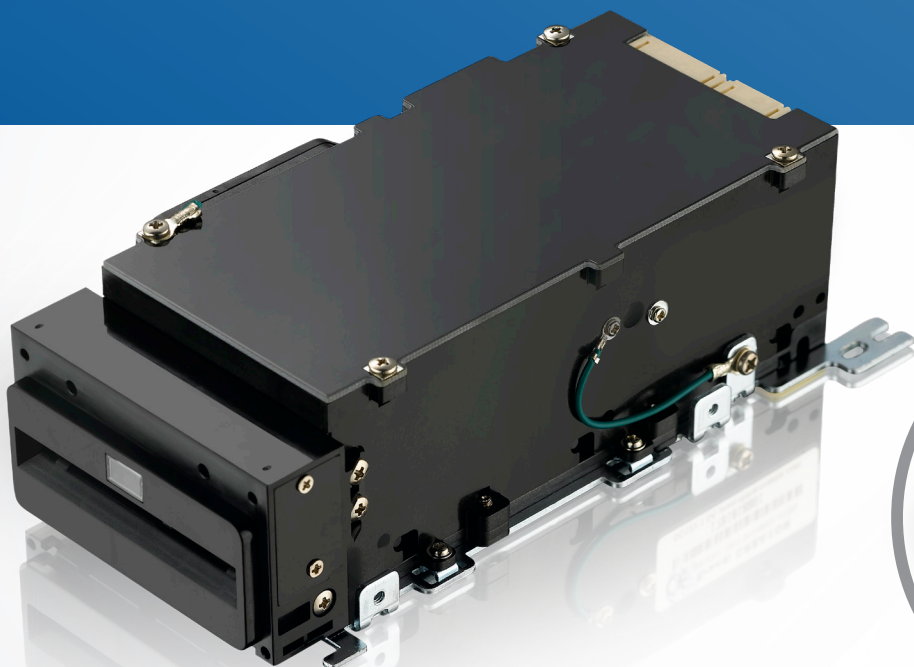

Call or email
for more info

P
+86 755 2671 0992

E
sales@china-creator.com

W
china-creator.com



Product Features

- IC/RFID card read/write, mag-stripe card read only
- Highly reliable & durable
- Automatic shutter, unlock by magnetic control or by switch
- Front/rear card-in card-out, jittery card-in control
- Power failure protection, eject card when power down
- Adapt to warped card design
- Optional part PSAM board
- WOSA complied
- EMV certified



Specifications

Card type	Magnetic Card ISO7810, ISO7811 IC Card ISO7816-1, 2, 3, 4 RFID Card ISO14443 Type A & B Support Mifare 1 S50, S70, UL Card, Mifare Plus, Mifare Desfire
Card dimension	Width: 53.92~54.18 mm, Length: 85.47~85.90 mm Thickness: 0.76±0.08mm
Power supply	DC12V±5%
Communication interface	RS-232 / USB (HID)
Operation current	Idle: < 150mA Peak: < 1500mA
Magnetic head	500,000 cycles
IC card contact	300,000 cycles
Drive parts	1,000,000 cycles
Environment conditions	Operation: 0~50°C / 0~90%RH (Non-condensing) Storage: -25~80°C / 0~95%RH (Non-condensing)
Weight	About 410g